

University of Groningen

## Quantum transitions of a small Josephson junction array

Wal, Caspar H. van der; Kuiper, P.; Mooij, J.E.

*Published in:*  
Physica B: Condensed Matter

*DOI:*  
[10.1016/S0921-4526\(99\)01643-9](https://doi.org/10.1016/S0921-4526(99)01643-9)

**IMPORTANT NOTE:** You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.

*Document Version*  
Publisher's PDF, also known as Version of record

*Publication date:*  
2000

[Link to publication in University of Groningen/UMCG research database](#)

*Citation for published version (APA):*  
Wal, C. H. V. D., Kuiper, P., & Mooij, J. E. (2000). Quantum transitions of a small Josephson junction array. Physica B: Condensed Matter, 280(1). [https://doi.org/10.1016/S0921-4526\(99\)01643-9](https://doi.org/10.1016/S0921-4526(99)01643-9)

### Copyright

Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

### Take-down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.

# Quantum transitions of a small Josephson junction array

Caspar H. van der Wal\*, P. Kuiper, J.E. Mooij

*Applied Physics and DIMES, Delft University of Technology, Lorentzweg 1, 2628 CJ Delft, The Netherlands*

## Abstract

We have experimentally studied a small Josephson junction array in the presence of microwave irradiation. The array has comparable energy scales for single-charge effects and the Josephson effect, resulting in a discrete set of macroscopic eigenenergy levels. Excitation of the array by low-power microwaves is possible at frequencies where the photon energy matches the level spacing. The microwave frequency and amplitude dependence show that the excitation mechanism involves resonant quantum coherent dynamics of the array. © 2000 Elsevier Science B.V. All rights reserved.

**Keywords:** Josephson effect; Macroscopic quantum mechanics; Microwave spectroscopy; Single-charge effects

## 1. Introduction

The appearance of discrete energy levels (DEL) when a degree of freedom is confined by a potential is a distinct quantum mechanical effect. In circuits of extremely underdamped Josephson junctions DEL that result from macroscopic degrees of freedom can be studied experimentally. These systems are equivalent to a particle, with a mass proportional to the junction capacitance  $C$ , whose phase coordinate  $\gamma$  (the phase degree of freedom of the Josephson junction) is confined by the Josephson potential  $-E_J \cos \gamma$ . Recently, the DEL of a device with a single superconducting grain coupled to leads via tunnel junctions have been demonstrated in experiments using microwave spectroscopy [1–3]. With such a circuit excited to a superposition of two energy states coherent charge oscillations have been observed [4].

## 2. Results

Here we study the quantum transitions between DEL of the array depicted in Fig. 1 [5]. For the junctions the ratio of the Josephson coupling  $E_J$  to the energy scale for single-charge effects  $E_C = e^2/2C$  was  $E_J/E_C = 0.2$ , with

$E_C/h = 28$  GHz. The level spacing between the DEL can be tuned continuously by inducing a gate charge  $n_g = C_g V_g/2e$  on the islands. The array was studied by measuring the switching current  $I_{SW}$  from the supercurrent branch in the  $IV$  (effectively the escape of a particle in the tilted washboard potential in Fig. 1). This method can be used for spectroscopy since  $I_{SW}$  is strongly reduced when the array is in an excited state [1]. Note however that the analysis is complicated. For the ground band the relation  $I_{bias} = (2e/h)\partial E/\partial \delta$  between the bias current and the phase difference across the array  $\delta$  is close to the form  $I_{bias} \propto \sin \delta$ , as shown in Fig. 1. From this picture it is clear that the level spacing  $\Delta E$  changes, and the resonance condition  $\Delta E = hf$  can be met, while adiabatically ramping the current for a switching current measurement.

Fig. 2 presents  $I_{SW}$  as a function  $n_g$ , measured in the presence of CW-microwaves. Additional low levels in  $I_{SW}$  around half-integer values of  $n_g$  are due to the presence of an unpaired quasiparticle on one or both islands, effectively changing  $n_g$  with  $\frac{1}{2}$  for that island [6]. Arrows indicate  $n_g$ -values where  $I_{SW}$  is strongly reduced, which is clearly frequency dependent. The dips move closer to  $n_g = 0$  with increasing frequency  $f$ , in agreement with a larger level spacing  $\Delta E$  between the ground state and the first excited state at  $n_g = 0$  where Coulomb blockade effects are maximal. For the reasons mentioned above the width of the dips cannot be interpreted as the lifetime of the excited states. When  $n_g$  is applied with an asymmetry of  $\Delta n_g = 0.15$  the level spacing between the first and

\* Corresponding author.

E-mail address: caspar@qt.tn.tudelft.nl (C.H. van der Wal)

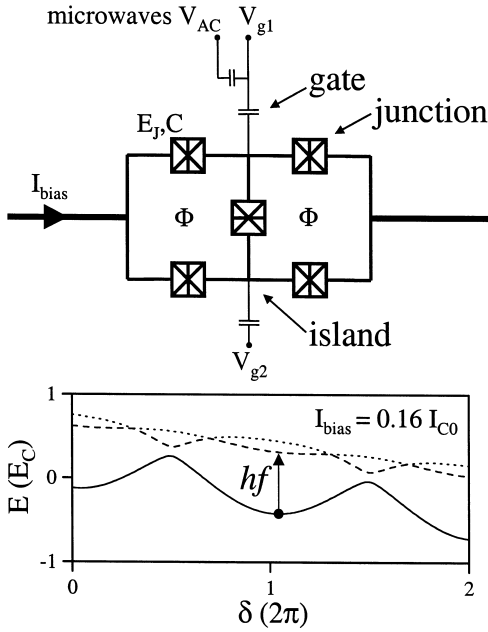


Fig. 1. Top: Schematic of the array. Here we only consider the case of symmetrically induced gate charges for the top and bottom island  $n_g = C_g V_g / 2e$ , and a magnetic flux  $\Phi = 0$  applied to the loops. Bottom: The lowest three bands of the array as a function of the phase  $\delta$  across the array, here calculated for  $E_J/E_C = 0.3$  and  $n_g = 0.37$  using [6]. At finite bias current the bands are tilted ( $I_{C0} = (2e/\hbar)E_J$ ).

second excited state is larger, and transitions to both the first and second excited state could be distinguished.

Measurements of the Bessel function behavior of the Shapiro-step heights in the voltage biased  $IV$  were used to calibrate the microwave amplitude  $V_{AC}$ . This was possible without any change to the array's electromagnetic environment. This showed that the data of Fig. 2 is typically recorded for  $V_{AC} < \hbar f / 2e$ , corresponding to an oscillating matrix element for transitions between the levels that is much smaller than the level spacing. This, together with the clear frequency dependence of the dips, indicates that the excitation mechanism involves reson-

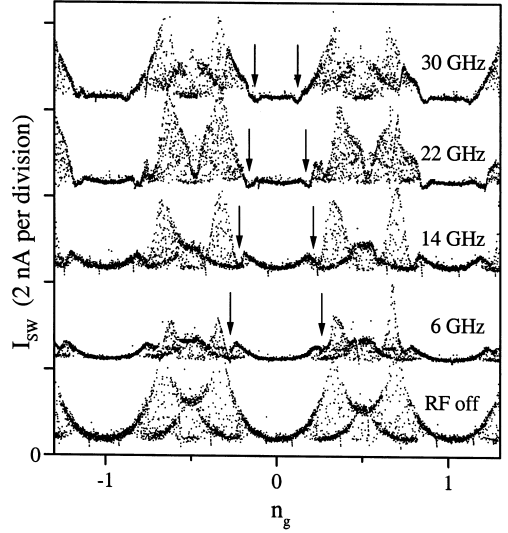


Fig. 2. Measurements of the  $2e$ -periodic modulation of the switching current  $I_{sw}$  by the dimensionless gate charge  $n_g$ , measured with different microwave frequencies, at a temperature of 10 mK. Data sets are 2 nA offset for clarity.

ant quantum coherent dynamics, similar to AC-pulse-induced Rabi dynamics in NMR.

### Acknowledgements

We thank Kees Harmans and Terry Orlando for discussions, and the Dutch FOM for support.

### References

- [1] D.J. Flees et al., Phys. Rev. Lett. 78 (1997) 4817.
- [2] D.J. Flees et al., J. Supercond. 12 (1999) 813.
- [3] Y. Nakamura et al., Phys. Rev. Lett. 79 (1997) 2328.
- [4] Y. Nakamura et al., Nature 398 (1999) 786.
- [5] P. Lafarge et al., Phys. Rev. B 54 (1996) 7380.
- [6] C.H. van der Wal et al., J. Supercond. 12 (1999) 807.